


FIG. 1  
E30-052

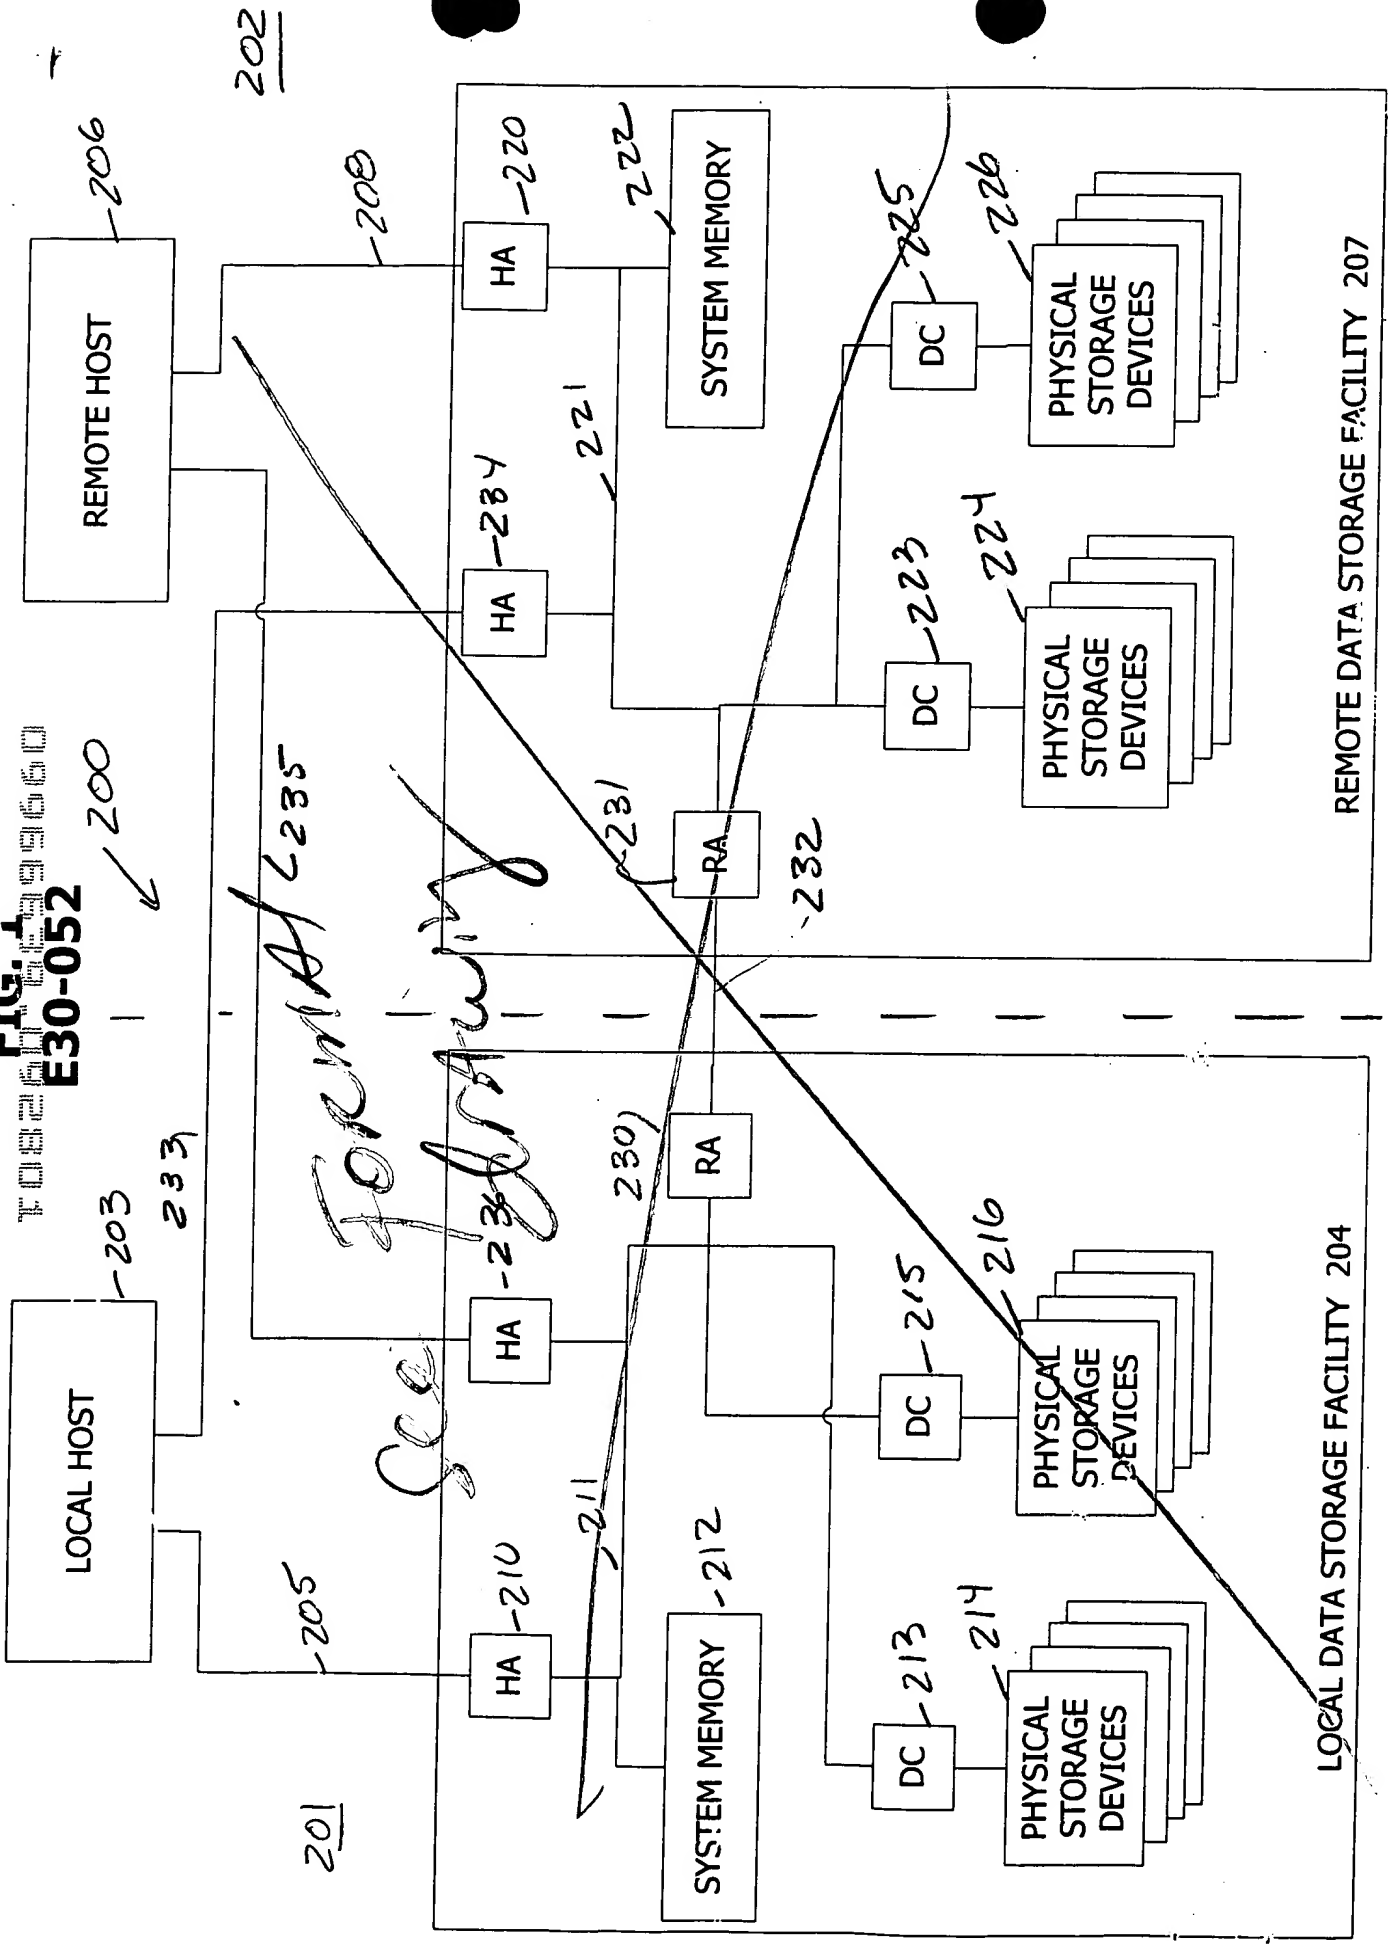

#4  
Form  
draft  
3/13/02

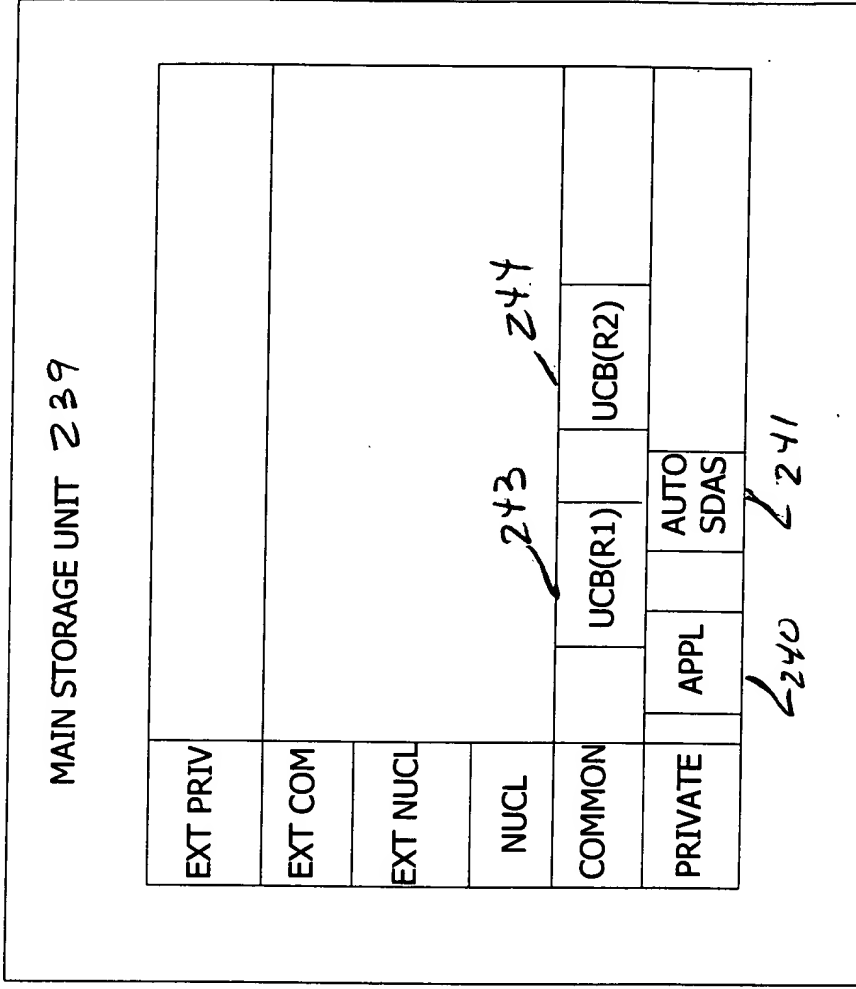
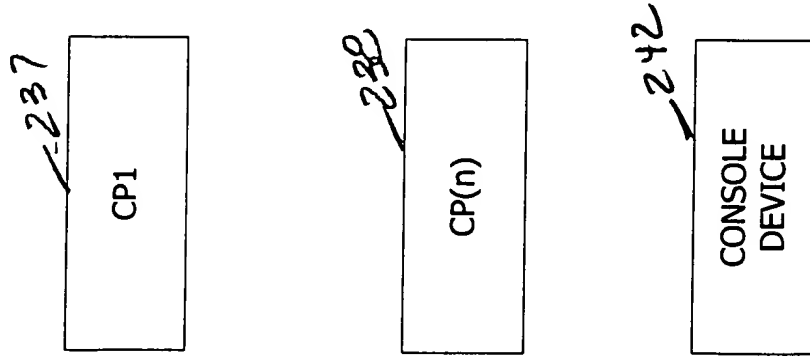


FIG. 2  
E30-052

241

	SOURCE (R1)	TARGET (R2)	GV	MODE	UCB PTR(R1)	UCB PTR(R2)
DN1						
DN2						
DN3						
...						
DNn						

245

247 248 252 253 254 255


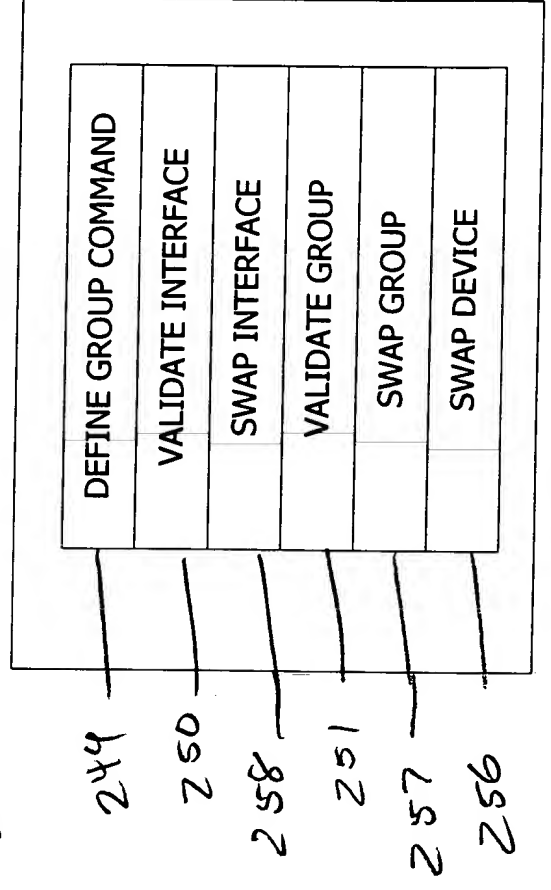


FIG. 3  
E30-052

103260" 6E99660


244 →

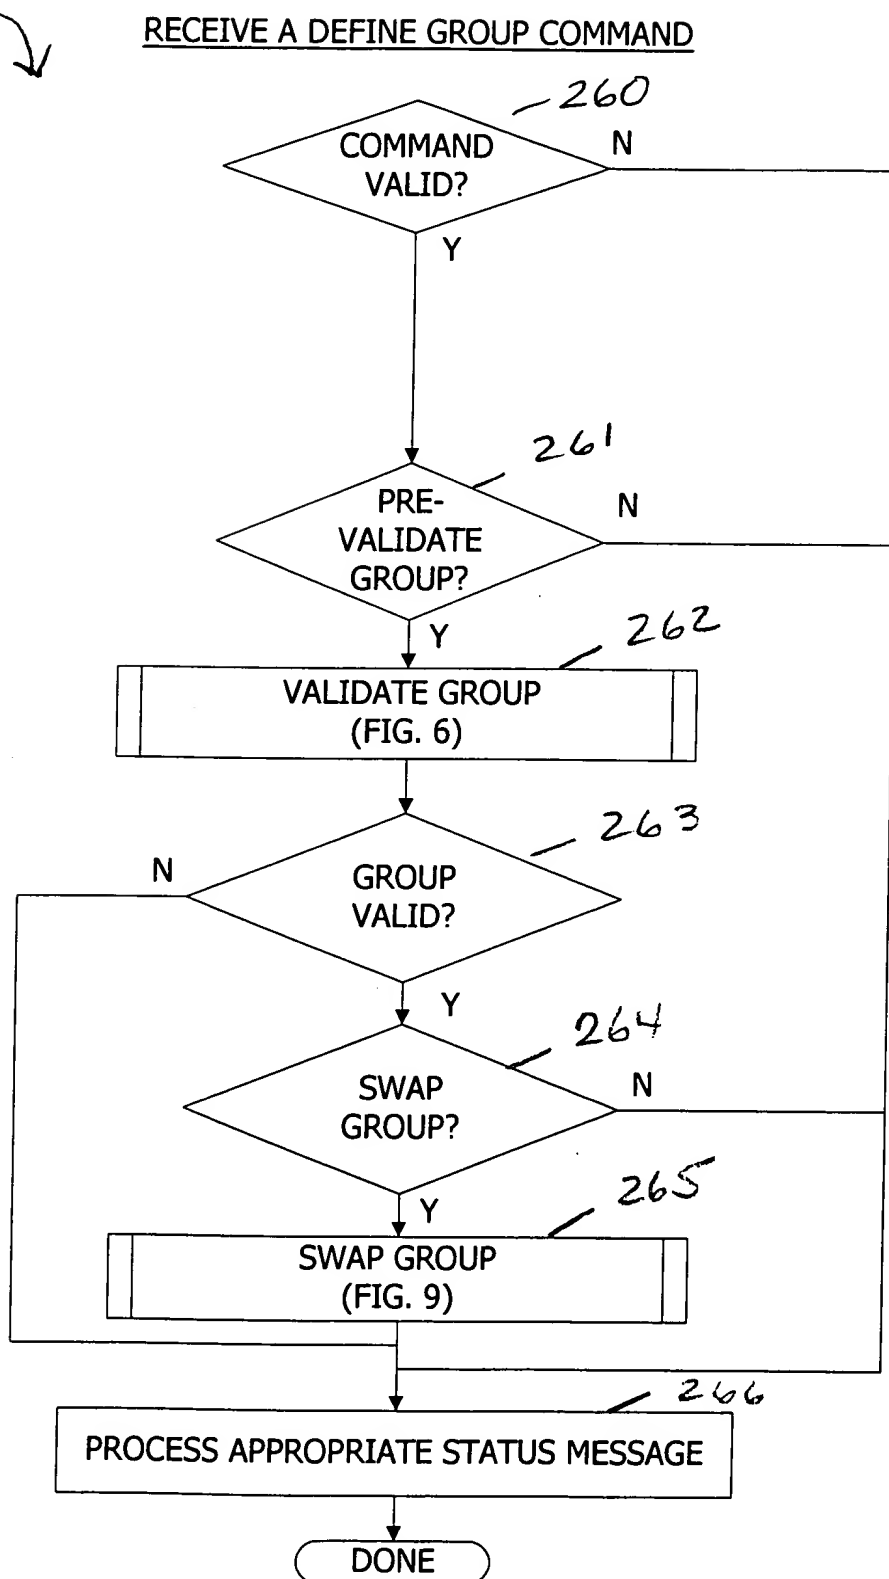

**FIG. 4**  
**E30-052**

VALIDATE INTERFACE

275 2

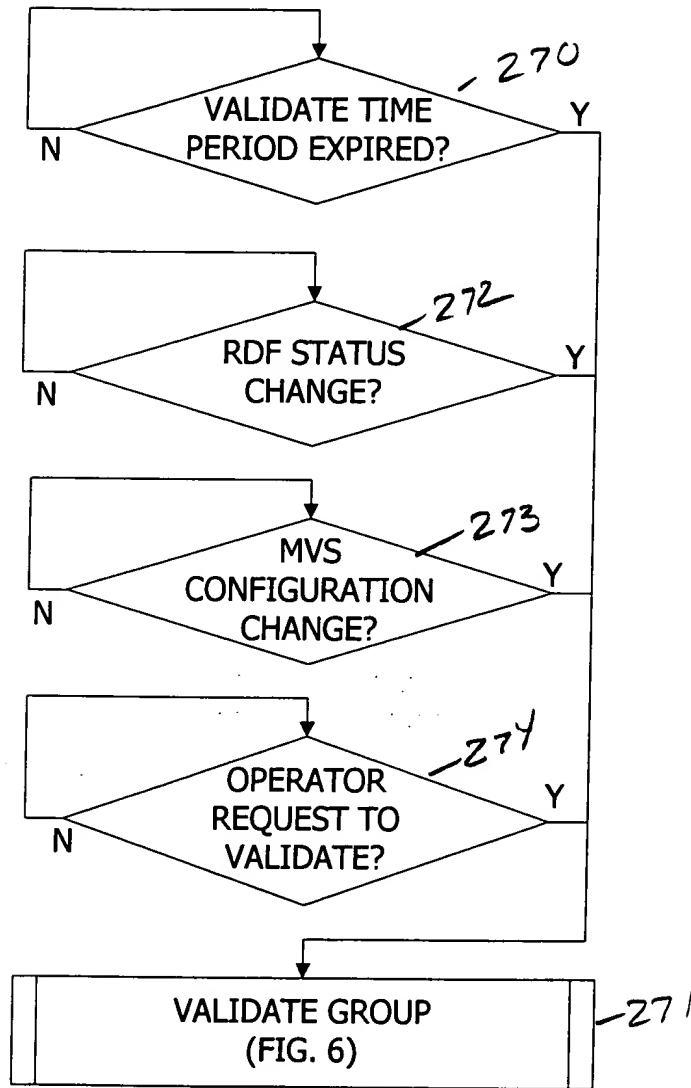

0996639-092804

**FIG. 5**  
**E30-052**

# VALIDATE GROUP SUBMODULE

OBTAIN THE DEVICE SPECIFICATION FROM THE GROUP DEFINITION

-280

246  
↓

SELECT THE NEXT SOURCE DEVICE

-281

SOURCE UCB  
DEFINED?

-282  
N

Y

-283

OBTAIN THE TARGET DEVICE

TARGET UCB  
DEFINED?

-284  
N

Y

UCB STATES  
VALID?

-285  
N

Y

-286

OBTAIN ALL THE INFORMATION ABOUT THE  
DATA STORAGE FACILITY AND VALIDATE  
THE RDF CONFIGURATION

Y

R1 -> R2

-287

N

R1 TNR?

-291

N

Y

VALID SOFTWARE  
FEATURES?

-293

N

Y

-294

BUILD DCE AND ESTABLISH PATH GROUP  
FOR THE TARGET DEVICE

SET THE DEVICE TO A VALID  
STATE

-295

SET THE DEVICE TO AN  
INVALID STATE

-296

MORE?

-297


Y

DONE

FIG. 6  
E30-052


090639 0901

# SWAP INTERFACE

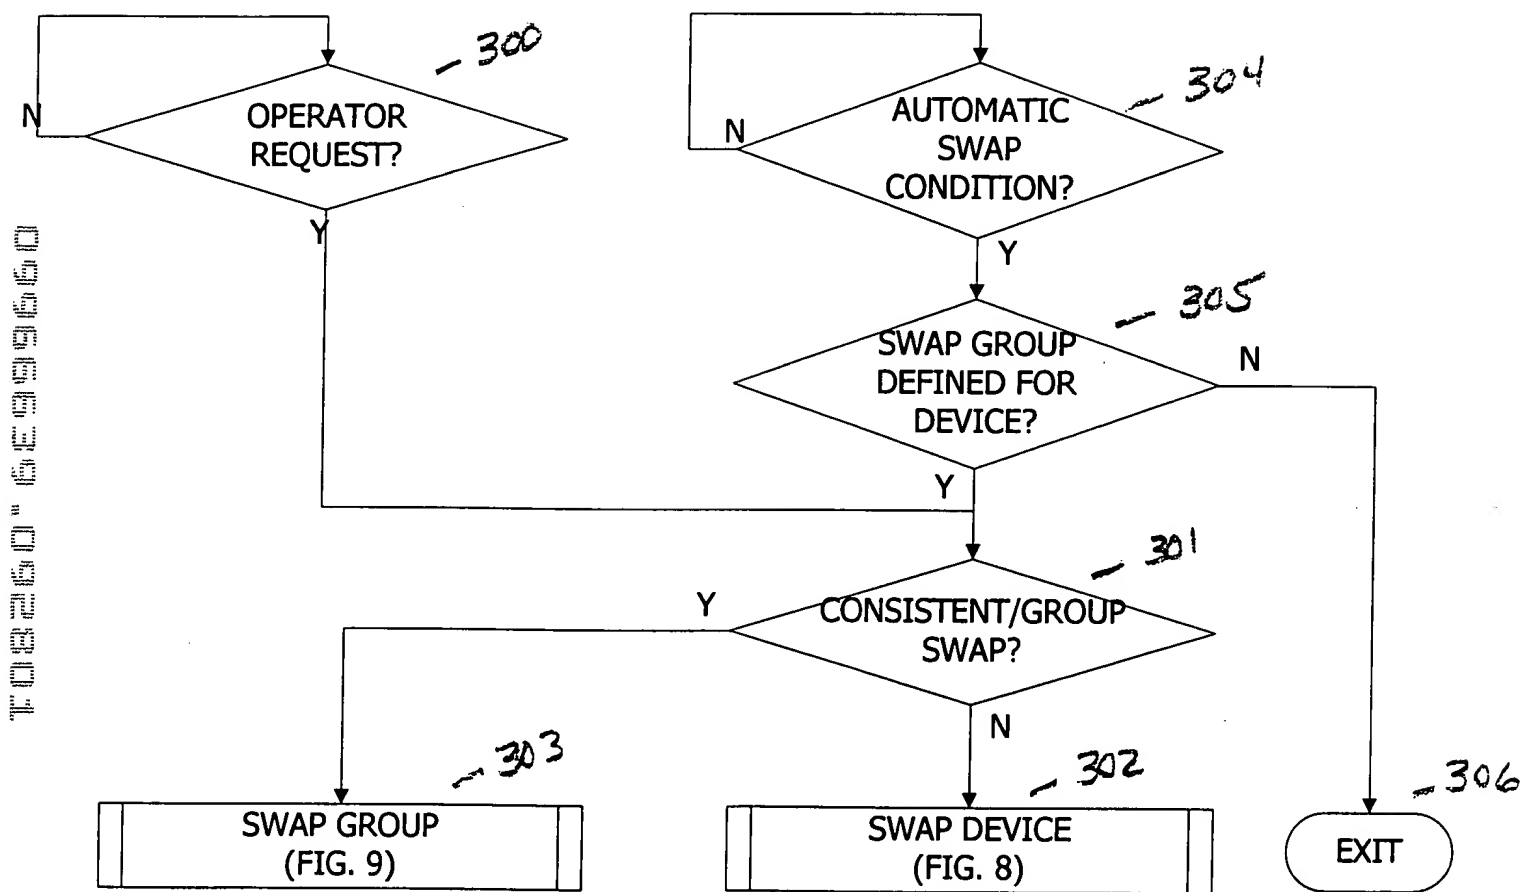

**FIG. 7**  
**E30-052**


# SWAP DEVICE

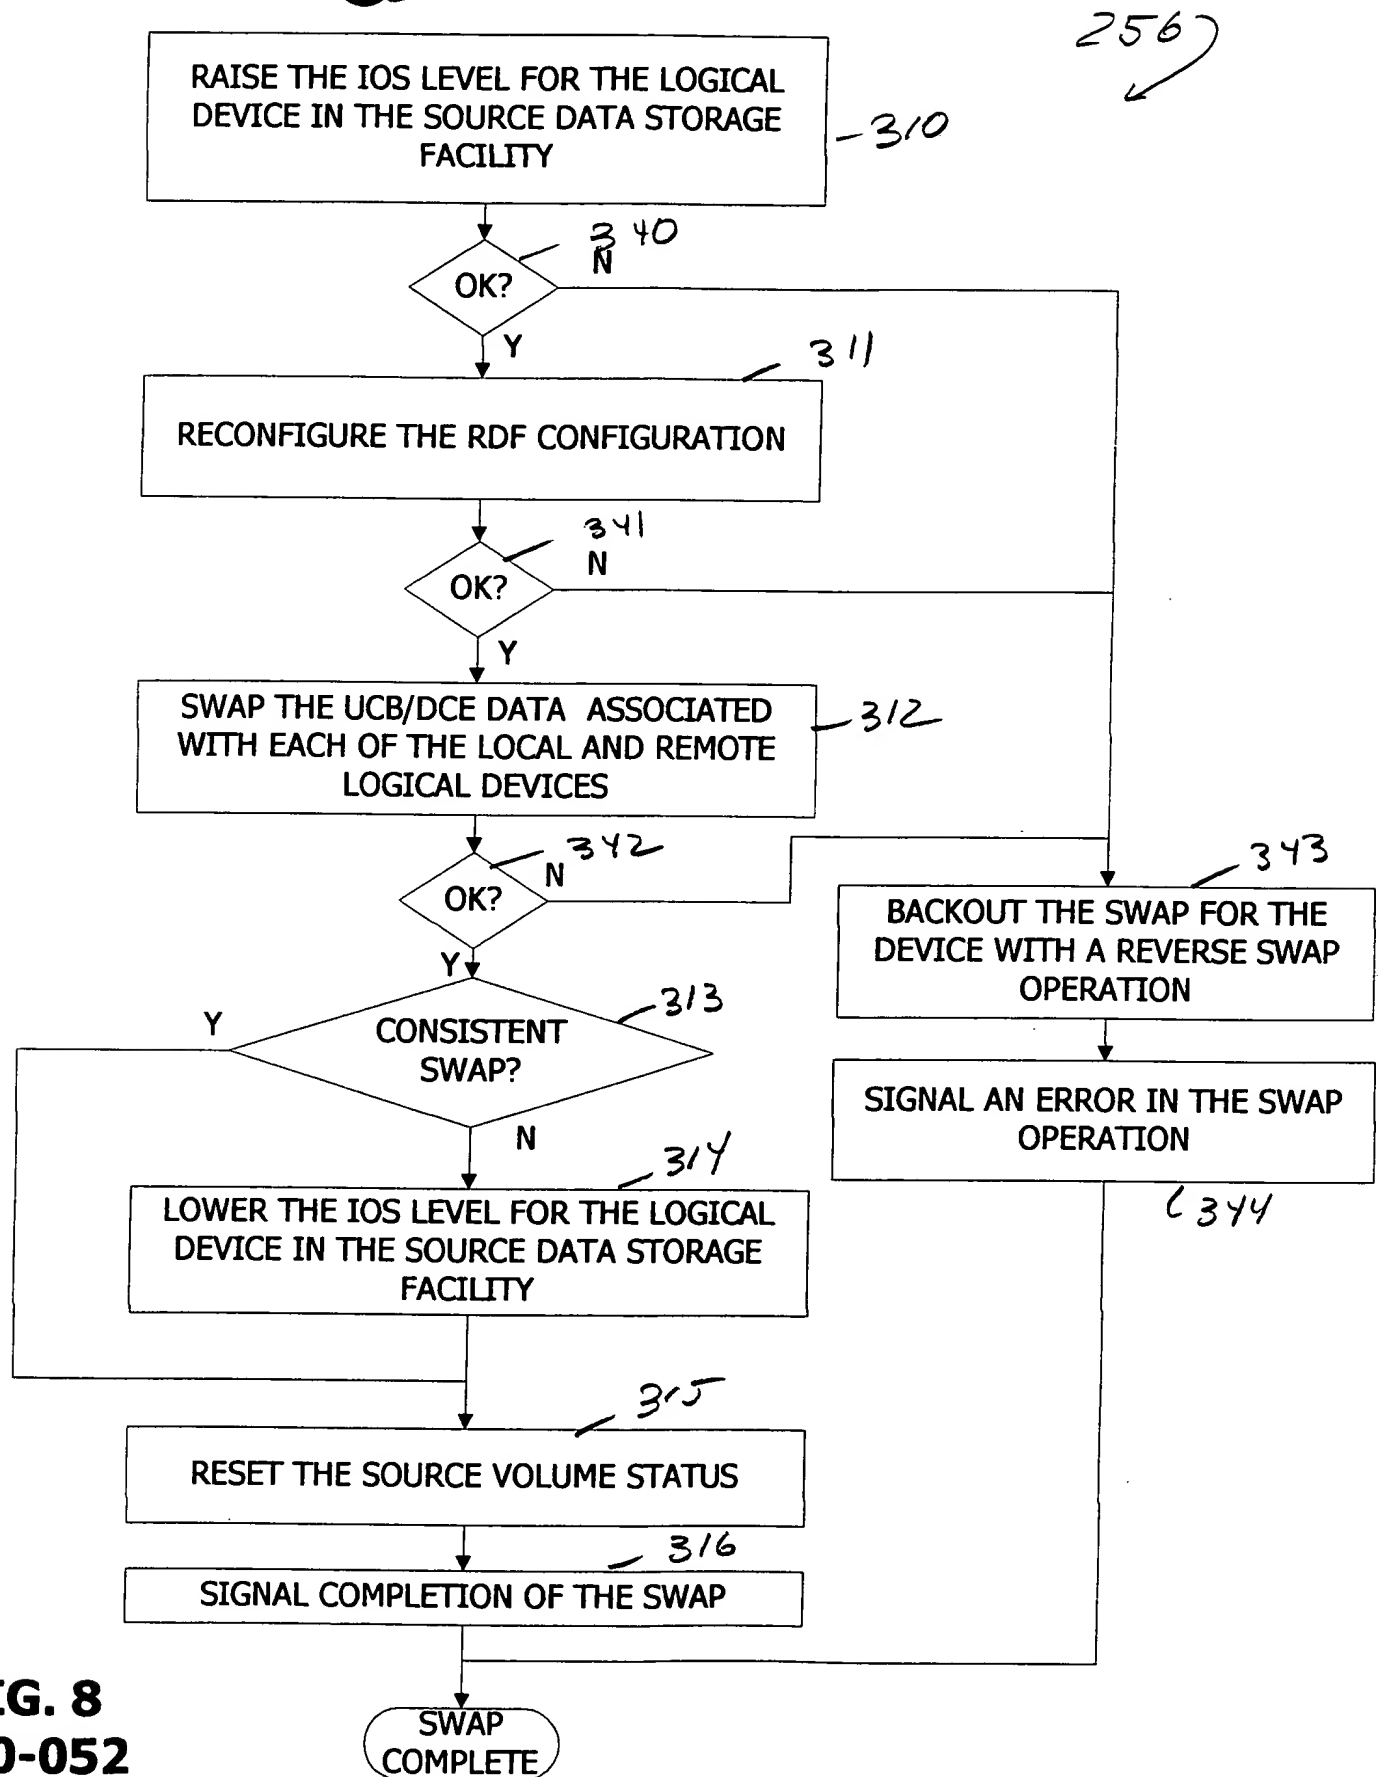

**FIG. 8**  
**E30-052**



SWAP GROUP

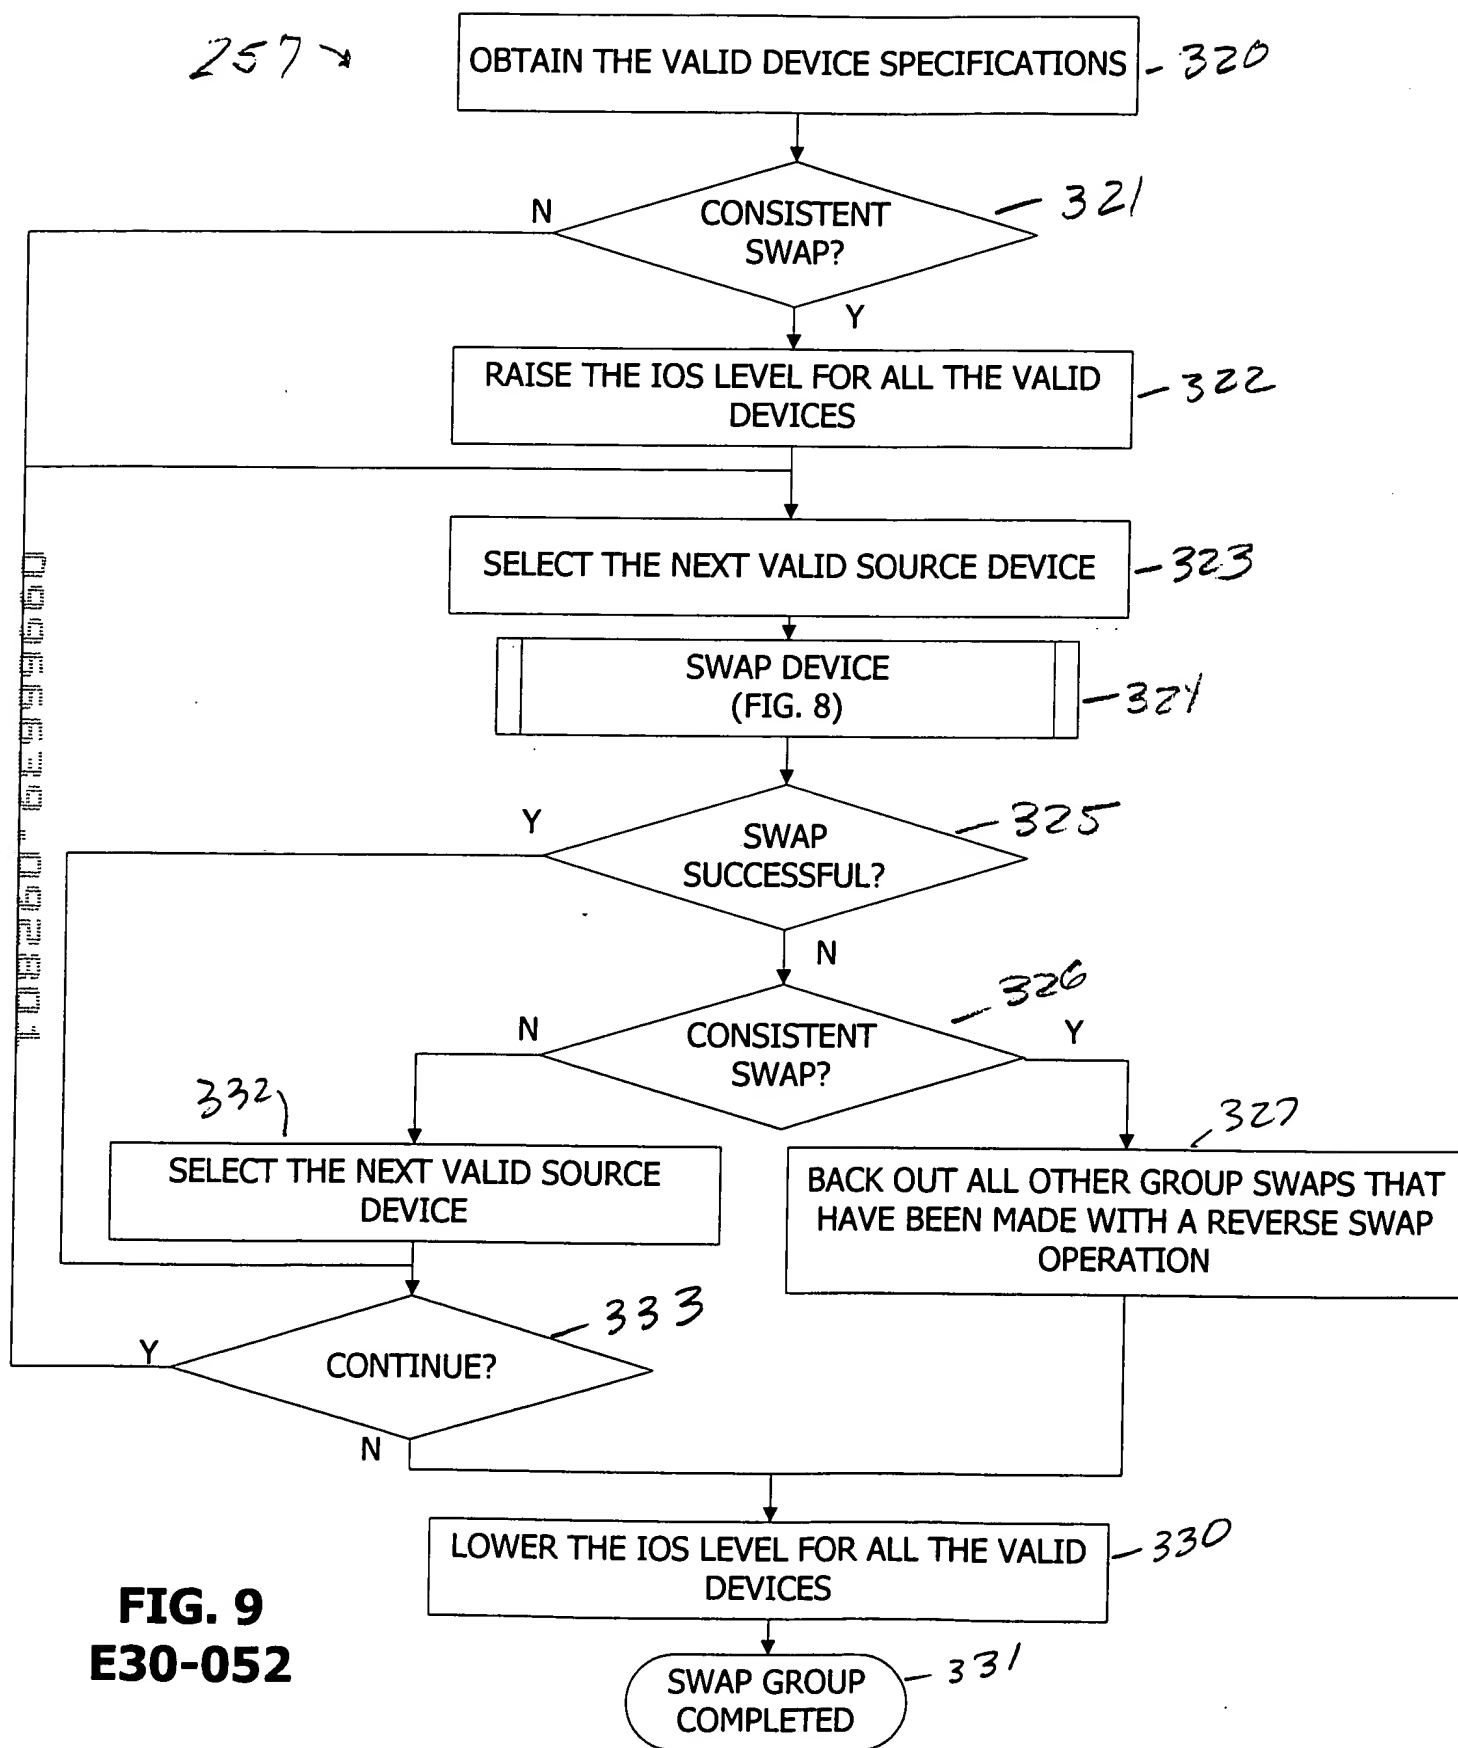

**FIG. 9**  
**E30-052**